

10/12/00  
JC915 U.S. PTO

10-13-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.  
GEMS8081.041

(New Nonprovisional Applications Under 37 CFR § 1.53(b))

TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith is the patent application of James W. Brinsfield, et al., entitled MOBILE CLINICAL INFORMATION SYSTEM for an:

- (X) Original Patent Application.
- ( ) Continuing Application (prior application not abandoned):
- ( ) Continuation ( ) Divisional ( ) Continuation-in-part (CIP)  
of prior application No: \_\_\_\_\_ Filed on: \_\_\_\_\_
- ( ) A statement claiming priority under 35 USC § 120 has been added to the specification.

Enclosed are 23 Pages. (X) Drawing(s); 5 Total Sheets.

- (X) Oath or Declaration:
- (X) A Newly Executed Combined Declaration and Power of Attorney:
- (X) Signed. ( ) Unsigned. ( ) Partially Signed.
- ( ) A Copy from a Prior Application for Continuation/Divisional (37 CFR § 1.63(d)).
- ( ) Incorporation by Reference. The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated herein by reference.
- ( ) Signed Statement Deleting Inventor(s) Named in the Prior Application. (37 CFR § 163(d)(2)).
- (X) Power of Attorney. (X) Return Receipt Postcard.
- ( ) Associate Power of Attorney. ( ) A Check in the amount of \$ .00 for the Filing Fee.
- ( ) Preliminary Amendment. ( ) Information Disclosure Statement and Form PTO-1449.
- (X) A Duplicate Copy of this Form for Processing Fee Against Deposit Account.
- ( ) A Certified Copy of Priority Documents (if foreign priority is claimed).
- ( ) Statement(s) of Status as a Small Entity.
- ( ) Statement(s) of Status as a Small Entity Filed in Prior Application, Status Still Proper and Desired.
- ( ) Other: \_\_\_\_\_

CLAIMS AS FILED					
FOR	NO. FILED	NO. EXTRA	RATE		FEE
			Large Entity	Small Entity	
Total Claims	31 ✓	11	\$18.00	\$ 9.00	\$198.00
Independent Claims	3 ✓	0	\$80.00	\$40.00	\$0.00
Multiple Dependent Claims (if applicable)					\$0.00
Assignment Recording Fee					\$0.00
Basic Filing Fee					\$710.00
Total Filing Fee					\$908.00

Charge \$ 908.00 to General Electric Company Deposit Account 07-0845 pursuant to 37 CFR § 1.25. At any time during the pendency of this application, please charge any fees required or credit any overpayment to this Deposit Account.

Respectfully submitted,  
By: Timothy J. Ziolkowski, Esq.  
Attorney of Record, Reg. No. 38,368

Date: 10/12/00

Correspondence Address:  
COOK & FRANKE S.C.  
660 East Mason Street  
Milwaukee, Wisconsin 53202-3877  
Phone: (414) 271-5900  
Fax: (414) 271-2002

I hereby certify that this is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated below and is addressed to:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

By: Rosa Stong

Typed: Rosa Stong

Express Mail Label No.: EL638759812US

Date of Deposit: 10-12-00

Inventors: James W. Brinsfield  
George M. Hutchinson

MOBILE CLINICAL INFORMATION  
SYSTEM

## BACKGROUND OF THE INVENTION

The present invention pertains to clinical information systems and more specifically, to a two-way, wireless clinical patient information monitoring system and a portable patient monitor.

Clinical patient monitoring systems generally consist of individual patient monitoring terminals connected to a centralized monitoring system staffed by a nurse or clinician. The centralized character of these systems allows a small number of caregivers to monitor a large number of patients. The patient monitor terminals typically stationed in the patients' rooms register activity such as heart rate, ECG, respiratory patterns, and other pertinent signs. In addition, drug infusion devices stationed by the patient deliver regulated dosages as prescribed and programmed by doctors and nurses. For bedside monitoring, these devices work adequately. However, patient mobility is hindered and becomes a hazard when transporting the bulky, inelegant bedside patient monitoring systems.

Another drawback of present clinical patient monitoring systems is that, while providing increased efficiency compared to earlier methods, nurses and other caregivers are still very dependent upon the information displayed at the patient's bedside. At the central nurses' station the monitoring system registers alarms and notifies health care providers when attention is required for a particular patient. However, without proceeding to the patient's room, a caregiver cannot discern the nature or seriousness of the alert. Some more recent systems have incorporated remote patient monitoring through the use of laptop computers, but that has not

eliminated the necessity of accessing the bedside equipment manually to adjust alarm parameters or change drug administration. An added burden placed upon the health care provider by using laptop systems is the cumbersome nature of carrying a laptop throughout the day. For example, placing the laptops on rolling carts eliminates the  
5 physical burden of carrying the device, but simultaneously eliminates the flexible nature of the mobile system initially envisioned.

Further inhibiting healthcare dispensation and endangering patient welfare is the risk of incorrect drug and dosage administration. Within existing systems, patient data such as prescription information and test results are not readily available in a real  
10 time format to on-the-scene health care providers. This problem creates the need for a solution that decreases the likelihood that a health care provider could deliver an erroneous prescription or dosage. A real time connection between prescribed data on file and the delivered quantity, in addition to test results from labs, would considerably enhance the quality and efficiency of the health care provided.

15 There is therefore a need for a two-way clinical patient information system. Addressing additional needs such as real time patient information, pharmacological data, and lab results, a two-way system would furnish caregivers with an effectual manner to deliver health care. For instance, a two-way patient monitoring device could permit a nurse to monitor real time patient vital signs, as well as change care  
20 parameters such as alarm status, all from a remote location, therefore saving time and energy. Scanning and comparing patient bar codes with prescription bar codes would prevent drug mishandling, and access to recent lab results would reduce the time needed for care decisions. Combining two-way communications ability with a

wireless patient monitoring system answers the need for comprehensive, efficient, and accurate health care administration.

#### SUMMARY OF THE INVENTION

The present invention provides a system and method of offering two-way, remote, mobile clinical care to patients within a health care facility by health care providers utilizing portable patient monitoring devices of a clinical patient information management system that solves the aforementioned problems.

In accordance with one aspect of the present invention, a wireless, bi-directional, portable patient monitoring device for integration with patient monitoring systems interfaces to receive, process, display, and allow for changes in patient care parameters. A communication interface of the device transmits and receives patient data from a wireless local area network (WLAN) within a medical facility. A processor connected to the communication interface processes patient data and parameters, displays the data in human discernable form on the device display, and implements changes in care parameters.

In accordance with another aspect of the invention, a wireless clinical information management system decentralizes patient monitoring by networking information and health care devices through an Ethernet. These devices include life support systems such as ventilators and infusion pumps, along with pharmacy databases, laboratory reports, central patient monitors, telemetry devices, and portable patient monitoring devices. The clinical information management system further involves wireless characteristics through a plurality of wireless LAN access points coupled to a server that process patient telemetry data and PPM instructions.

In accordance with yet another aspect of the present invention, a computer program is provided that resides in the memory of the portable patient monitor, causing the processor to remotely scan a WLAN to find any patient alarms, sound an alarm if the patient alarm occurs, and allow user silencing of the alarm at the portable patient monitor and/or at a bedside monitor. The program also displays patient data in real time. The computer program can further cause the processor to periodically check battery charge and display a warning if the rechargeable battery charge is low. The computer program also allows user adjustment of alarm parameter violation limits, relay patient admission and discharge information to the WLAN, and to process audio data from a health care provider to a recorded medical history of a patient.

The portable patient monitor can include a personal data assistant (PDA) that optionally provides PDA functions to a health care provider. A few of the PDA functions accessible to the health care provider consist of a scheduler, reminders, to-do lists, and other PDA functions. The system can optionally include a speaker and microphone voice module, wherein the processor is programmed to process data to permit voice-over-internet protocol (IP) transfer. Also helpful, the program can permit alarm silencing of a bedside monitor, bedside admitting and discharging of patients, and adjustment of alarm parameter violation limits.

Various other features, objects and advantages of the present invention will be made apparent from the following detailed description and the drawings

## BRIEF DESCRIPTION OF THE DRAWINGS

The drawings illustrate one preferred embodiment presently contemplated for carrying out the invention.

In the drawings:

Fig. 1 is a schematic diagram of a prior art one-way wireless clinical  
5 information management system.

Fig. 2 is a schematic diagram of a bi-directional, wireless clinical information management system according to the present invention.

Fig. 3 is a block diagram of a network connecting the clinical information management system of Fig. 2.

10 Fig. 4 is a block diagram of a portable patient monitoring device in accordance with present invention.

Fig. 5 is a flow chart of a process and software in accordance with the present invention. .

15

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 is a prior art clinical information management system 36 that relays telemetry signals 20, such as patient vital signs and waveforms, from a plurality of patients 18 in patient rooms 34 to a plurality of mobile health care providers 28, for use in a health care facility 38. A centralized patient monitor (CPM) 32 includes a computer 10 staffed by a health care provider 29 in the vicinity of a central monitoring point such as a nurses' station 33. The CPM 32 is connected via a communications link 12 to a series of telemetry receivers 14 for each of a plurality of patient telemetry transmitters 16. The telemetry transmitters 16 are carried by patients 18 and send a one-way, wireless signal 20 to the receivers 14 from ECG leads 15. The receivers 14 then relay the signals 20 to the CPM 32. The CPM 32 is also connected via a communications link 22 to a server 24 that stores and relays data. The server 24 relays signals 26 to the mobile health care providers 28 who carry a receiving device 30 to display the signal information 26.

For instance, if an irregularity initiates an alarm sequence on a bedside patient monitor (not shown), the roaming health care provider 28 can be notified regardless of his or her position in the hospital, or other such health care facilities 38. In addition, the patient 18 gains the ability to move freely by use of a wireless link between the patient telemetry transmitter 26 and cumbersome stationary bedside monitoring systems. Although this system increases patients' 18 and attendants' 28 roaming capability, it retains rigid one-way communication abilities and on-site patient care requirements.

Fig. 2 is a block diagram of the present invention. A clinical patient information management system 51 according to the present invention includes a



includes a computer terminal 40 operated by a health care provider 58 within a central location such as a central nurses' station 43 in a health care facility 39. However, with implementation of the present invention, as will become apparent, the health care provider 58, positioned at nurses' station 43, can be eliminated since the mobile health care providers 58 will now have the data and control previously reserved for the nurse in the centralized patient monitor 41. The server 44 is connected peripherally to hospital labs 52, a pharmacy 50, a voice router 54, and to a number of portable patient monitoring devices (PPMs) 56 by a wireless local area network (WLAN). Simultaneously, the server 44 can access real time data from labs 52 and the pharmacy 50, and can transmit such data to the PPMs 56, keeping the health care providers 58 updated at remote locations. The server 44 can also convey signals from the CPM 41 to the PPMs 46. Such signals can include current patient data, ECG waveforms, and alarm signals.

access points 45 are connected to the server 44 to relay signals 64 between the server 44 and the plurality of PPMs 56. WLAN access points 45 include commercially available two-way modem technology transmitters/receivers and antennas that preferably operate on an industry standard protocol. PPMs 56, positioned on mobile health care providers 58, receive signals 64 from the WLAN access points 45 and

display them in clear, comprehensive, and user-friendly form. The two-way wireless signals 64 are transmitted between the server 44 via the WLAN 45 and the health care providers 58 to enhance the caregivers' mobility.

Wireless patient telemetry transmitters/receivers (i.e., transceivers) 60 are carried by patients 62 and accord patients 62 with a degree of freedom and flexibility to accelerate their recovery. While vital sign signals 48 that are captured by the ECG leads 68 are normally displayed on stationary bedside monitoring equipment, with wireless telemetry transceivers 60, patients 62, can get exercise while ECG leads 68 monitor vital signs and send the signals 48 to the PPMs 56. This allows health care providers 58 to maneuver and obtain the clinical information without bulky monitoring systems.

Fig. 3 shows a block diagram of the infrastructure for a clinical patient information monitoring system 51 connected through a network, such as an Ethernet 42. In a preferred embodiment, the network 42 is a GE Marquette Unity™ Ethernet network available from GE Medical Systems Information Technologies, Inc. The network 42 utilizes IEEE 802.3 standard Ethernet protocols and IEEE 802.11 WLAN as an extension of the wired system to network devices such as ventilators 57, infusion pumps 55, bedside patient monitoring systems 53, telemetry systems 46, and other hospital information systems in a comprehensive, efficient manner. The network 42 allows multiple devices connected to the network to operate in synchronization with each other while distributing patient information among the various hospital information systems. The pharmacy 50, labs 52, WLAN access points 45, the CPM 41, server 44, and portable patient monitors 56 comprise various hospital information systems.

In a preferred embodiment of the invention, life-sustaining devices such as ventilation systems 57 and infusion pumps 55, along with bedside monitors 53, are networked through network 42 to communicate with server 44 and CPM 41.

Pharmacy 50 and labs 52 information systems provide data to health care providers 58 through the server 44, WLAN access points 45, patient telemetry systems 46, and the portable patient monitors 56 over the network 42. Optionally, a wireless patient bedside monitor 69 can operate within the clinical information management system 51. In that case, the signals 64 are also transmitted over the WLAN access points 45 to the wireless bedside monitor 69.

Other networked systems within the facility can interface with the clinical patient information monitoring system 51 through the use of standard based networking. Critical reports and diagnostic analysis prepared in various regions of the facility are available as they are completed by direct interfaces between the clinical patient information monitoring system and the decentralized diagnostic locations.

The clinical patient information management system 51 also provides a decentralized, wireless, real-time monitoring capability for infusion pumps 55, ventilators 57, and other potentially non-networked machines such as the bedside monitors 53, the wireless bedside monitors 69, etc.

In a preferred embodiment, the wireless patient telemetry transceivers 60 transmit data 48 to the telemetry receivers 46 that then relays the information to appropriate appendages of the network 42. Such appendages include the PPM remote terminals 56. Any required modification in patient care parameters by a health care provider 58 can be relayed back to the patient through the network 42 to control patient care by using the PPMs 56. In response to patient status, a two-way wireless

connection 64 between the server 44 and the PPMs 56 allow the health care provider 58 to adjust patient care parameters and/or to modify alarms. The health care provider 58 has the advantage in this system of the ability to send and receive information across the two-way wireless connection 64. For example, the health care provider 58 is able to compare dosage instructions on prescription medicine from the pharmacy 50, adjust alarm parameters, communicate through a voice module 72, and monitor real-time patient information such as ECG waveforms. The two-way wireless remote nature of the system 51 provides the health care provider 58 with a way to achieve more accurate and efficient care.

Fig. 4 is a block diagram of a PPM remote terminal 56 according to the present invention. The PPM 56, in general, has a size and shape that allows health care providers to carry it for extended periods of time. At the hardware level of a preferred embodiment, the PPM is based on a Personal Data Assistant (PDA) platform. The PDA provides a direct interface to the user with the various functions of the clinical information management system, in addition to personal efficiency functions such as a calendar, to-do lists, reminders, e-mail, and other such functions. The PPM is also designed to record voice reports to enable immediate recordation of patient events. Preferably, the invention could support dictation functions to record patient medical events. In one embodiment of the invention, the PDA can be adapted from a commercially available device, such as Symbol Technologies SPT 1700. The device can be based on the Palm Computing® platform, the Windows CE® platforms, or any other comparable or similar platform. Windows CE® is a registered trademark of Microsoft Corp.

In the preferred embodiment, the PPM 56 includes a microcontroller 70 connected to a speaker/microphone voice module 72 to receive and transmit voice data. A memory unit 74 is preferably a combination of ROM and RAM, wherein the ROM is used for static data, such as computer programs, and the RAM is used for dynamic data, such as the ECG signals received from the patient 62. A bar code scanner 76 is provided to read bar codes, such as those used to identify patients and those used on reports and pharmaceutical products. An A/D converter 78 converts analog to digital data for processing by the microcontroller 70, and conversely converts the digital data from the microcontroller to analog form which is then supplied to encoder 90 to code and decode the analog data for transmission through the communications interface 92 and an antenna 94. An input select key 80 is provided to select which particular menu is to be displayed on display 88. A control device input 86 is used to navigate through each of the menus that are displayed. Page input 82 is provided to acknowledge a page to a particular health care provider. An RF communications card 84 is connected to the microcontroller 70 which can include an industry standard PCMCIA card for RF communication. These components, in the aggregate, achieve functions that enable the health care provider to administer efficient and accurate care.

More specifically, the microcontroller 70 is programmed to receive and process patient data, display the data, and receive and transmit care parameters via the ancillary devices connected to the microcontroller 70. The microcontroller 70 is programmed to receive and transmit patient data in conjunction with the PPM communication interface 92. Some of the data contained includes bar code data that the microcontroller 70 is programmed to receive from the bar code scanner 76. The

The multiple functions of the PPM 56 include devices that interface with the microcontroller 70, and utilize capabilities of the clinical patient information system 51. Audio data received and transmitted by the microcontroller 70 from the audio module 72 is possible through “voice over IP” protocols that support transmitting compressed voice data over an Ethernet. The Ethernet network 42, in conjunction with the PPM 56, supports telephony and paging functions anywhere within the coverage area. No additional RF infrastructure is required to attain telephony or paging services. This solution eliminates the need for a health care provider 58 to carry multiple devices throughout the day such as mobile phones and/or pagers. Additionally, the use of a single RF protocol reduces the likelihood of interference from other wireless systems.

In a typical preferred embodiment of this invention the microcontroller 70 is programmed to interact with components of the PPM 56 to allow the health care

provider 58 to communicate on a two-way basis with other segments of the clinical information management system 51. The preferred implementation sequence of the present invention is expressed by the flow chart of Fig. 5.

At the start 100 of the software sequence of the PPM 56 the battery charge is  
 5 checked at 102. In accordance with the invention, a setup procedure request is initiated 104 if the battery charge is sufficient for operation. If desired at this point, the health care provider can access alarm-warning parameters and define warnings 106, advisories 108, and messages 110. If not desired 112, the routine commences scanning the network 114.

10 Initially, the scanning purpose is to check the validity of the network connection 116. The next scan is of the patients on the system 118. The health care provider is primarily concerned with current alarm flags that would require instant attention. If there are alarms 120, 122, the PPM will sound an audio alarm 124 through the audio module, and patient information is displayed 126. If there are no  
 15 alarms 120, 128, then the health care provider enters a subroutine to monitor specific patients 130. After entering a patient ID 132, the subroutine joins with the main routine to display pertinent information, such as patient ID, ECG data, vital signs, and alarm type at 126. The health care provider can then decide to change any of the patient parameters 134, including turning alarms off.

20 During specific patient monitoring, the health care provider can scan barcode IDs that are then compared by the microcontroller with information gleaned from hospital lab and pharmacy data. This data is compared in real time with the earliest data available. In the background, the microcontroller is programmed to periodically check the battery charge 136. There are several stages of alert for the battery charge,

002101 "4268960

ranging from 30-minute charge warnings, to urgent five-minute warnings. The health care provider can power down the PPM 138, 140 at the end of a shift which then automatically triggers a save function for all the data 142, and the sequence ends at 144. If the battery charge is sufficient for continued use and the health care provider  
5 desires continued use 138, 146, patient scanning and monitoring continues until the device is powered down 138, 140.

As previously discussed, the portable patient monitor (PPM) is preferably packaged within a housing that is transportable on a health care provider for extended periods. Preferably, the PPM has an approximate length of 7" (17.8 cm), a width of  
10 approximately 3.75" (7.5 cm) and a thickness of approximately 1.0" (2.54 cm).

The present invention has been described in terms of the preferred embodiment, and it is recognized that equivalents, alternatives, and modifications, aside from those expressly stated, are possible and within the scope of the appending claims.



## CLAIMS

1. A wireless bi-directional portable patient monitor comprising:  
a communication interface to receive patient data from a wireless local  
area network (WLAN) within a medical care facility and transmit care parameters as  
needed to the WLAN in response thereto;  
5 a processor connected to the communication interface to process the  
patient data and the care parameters;  
a display connected to the processor to display the processed patient  
data in human discernable form; and  
an input device connected to the processor to allow a change in the  
10 care parameters by a health care provider.
2. The portable patient monitor of claim 1 wherein the processor decodes  
the patient data to process and display the patient data and encodes the care  
parameters to transmit the care parameters to the WLAN.
3. The portable patient monitor of claim 1 wherein the portable patient  
monitor is a primary monitoring device.
4. The portable patient monitor of claim 1 wherein the processor  
processes the patient data to display ECG and vital sign data for a selected patient.
5. The portable patient monitor of claim 1 wherein the communication  
interface is compatible with an existing WLAN.

6. The portable patient monitor of claim 1 wherein the portable patient monitor is packaged within a housing that is transportable on a health care provider for extended periods.

7. The portable patient monitor of claim 6 having a length of approximately 7" (17.8 cm), a width of approximately 3.75" (9.5 cm), and a thickness of approximately 1.0" (2.54 cm).

8. The portable patient monitor of claim 1 wherein the processor is programmed to allow alarm silencing of a bedside monitor, and admit and discharge patients.

9. The portable patient monitor of claim 1 wherein the processor is programmed to allow adjustment of alarm parameter violation limits.

10. The portable patient monitor of claim 1 further comprising a speaker and microphone, and wherein the processor is programmed to process data to permit voice-over-internet protocol (IP) transfer.

11. The portable patient monitor of claim 1 further comprising a bar code scanning module and a bar code scanner, and wherein the processor is programmed to receive and compare patient data with data obtainable from a centralized database that

includes pharmaceutical and patient bar codes to ensure dosage accuracy, and doctor  
5 orders.

12. The portable patient monitor of claim 1 wherein the processor is further programmed to interface with non-proprietary networked systems.

13. The portable patient monitor of claim 12 wherein the processor is further programmed to interface with infusion pumps and ventilators.

14. The portable patient monitor of claim 1 wherein the processor is further programmed to receive patient reports and diagnostic analyses prepared at other locations in the medical care facility to provide the health care provider with the patient reports and diagnostic analyses in real time.

15. The portable patient monitor of claim 1 further comprising a PDA module to provide PDA functions to the health care providers.

16. The portable patient monitor of claim 15 wherein the PDA functions include a scheduler, reminders, to-do lists, and other PDA functions.

17 The portable patient monitor of claim 1 further comprising a microphone and a digital audio recorder module to input a record of patient medical events by the health care provider.

18. A mobile clinical information management system to decentralize patient monitoring comprising:

a portable patient monitor having a processor connected to a communication interface to receive and process patient data and to process and transmit care parameters, a display to display the patient data, and an input device to change the patient care parameters, the portable patient monitor having a configuration to allow wireless transport on a health care provider for extended periods;

a plurality of bedside patient monitors to connect to a plurality of patients and transmit patient data;

a WLAN coupled to the plurality of bedside patient monitors and the portable patient monitor.

19. The system of claim 18 further comprising a plurality of portable patient monitors, each portable patient monitor assigned to a given number of patients.

20. The system of claim 18 wherein the processor further:  
decodes the patient data to process and display the patient data and  
encodes the care parameters to transmit the care parameters to the WLAN; and  
processes the patient data to display ECG and vital sign data for a  
5 selected patient on the portable patient monitor.

21. The system of claim 18 wherein the portable patient monitor is a  
primary monitoring device and wherein a communication interface of the portable  
patient monitor is compatible with an existing WLAN.

22. The system of claim 18 wherein portable patient monitor has a length  
of approximately 7" (17.8 cm), a width of approximately 3.75" (9.5 cm), and a  
thickness of approximately 1.0" (2.54 cm).

23. The system of claim 18 further comprising a speaker and  
microphone, and wherein the processor is programmed to:  
allow alarm silencing of a bedside monitor;  
admit and discharge patients;  
5 adjust alarm parameter violation limits; and  
process data to permit voice-over-internet protocol (IP) transfer.

24. The system of claim 18 further comprising:

a bar code scanning module and a bar code scanner and wherein the processor is programmed to receive patient data encoded in a patient wristband, and to compare patient data with data obtainable from pharmaceutical bar codes and a centralized database to check dosage accuracy and compliance with doctor orders;

wherein the processor is further programmed to interface with infusion pumps and ventilators, and to receive patient reports and diagnostic analyses prepared at remote locations in the medical care facility to provide the health care provider with the patient reports and diagnostic analyses in real time.

25. The system of claim 18 wherein the portable patient monitor includes a

PDA module having PDA functions that include a scheduler, reminders, and to-do lists, and further comprises a microphone and a digital audio recorder module to record an audio input by the health care provider into the microphone and record patient medical events.

26. A computer program residing in memory of a portable patient monitor  
to cause a processor to:

remotely interface to a WLAN to acquire any patient alarms;  
sound an alarm if a patient alarm occurs;

5 allow user silencing of the alarm at the portable patient monitor and at  
a bedside monitor; and  
display patient data.

27. The computer program of claim 26 wherein the computer program  
further causes the processor to:

periodically check a recharged battery charge; and  
display a warning if the rechargeable battery charge is low.

28. The computer program of claim 26 wherein the computer program  
further causes the processor to allow user adjustment of alarm parameter violation  
limits.

29. The computer program of claim 26 wherein the computer program  
further causes the processor to relay patient admission and discharge information to  
the WLAN.

30. The computer program of claim 26 wherein the computer program further causes the processor to process audio data from a health care provider to record medical history of a patient.

31. The computer program of claim 26 wherein the computer program further causes the processor to scan a bar code from a patient ID and compare data obtained therefrom with data on the patient from a main patient database to ensure proper medical treatment.

002704-4268950



## MOBILE CLINICAL INFORMATION SYSTEM

## ABSTRACT

A wireless bi-directional portable patient monitor incorporated into a mobile clinical information management system is disclosed. The portable patient monitor includes a communications interface to receive patient data from a wireless local area network within a medical care facility and transmit care parameters as needed to the wireless network in response. The portable patient monitor includes a processor connected to the communications interface to process the patient data and the care parameters. A display is connected to the processor to display the processed patient data to the health care provider. The monitor includes an input device connected to the processor to allow a change in the care parameters by the health care provider. The portable patient monitor is also configured to allow wireless transport on the health care provider for extended periods. The mobile clinical information management system includes a number of bedside patient monitors to connect to the patients and transmit the patient data. The system also includes the wireless network coupled to the bedside patient monitors and the portable patient monitors to improve efficiencies in the delivery of health care in the medical care facility.

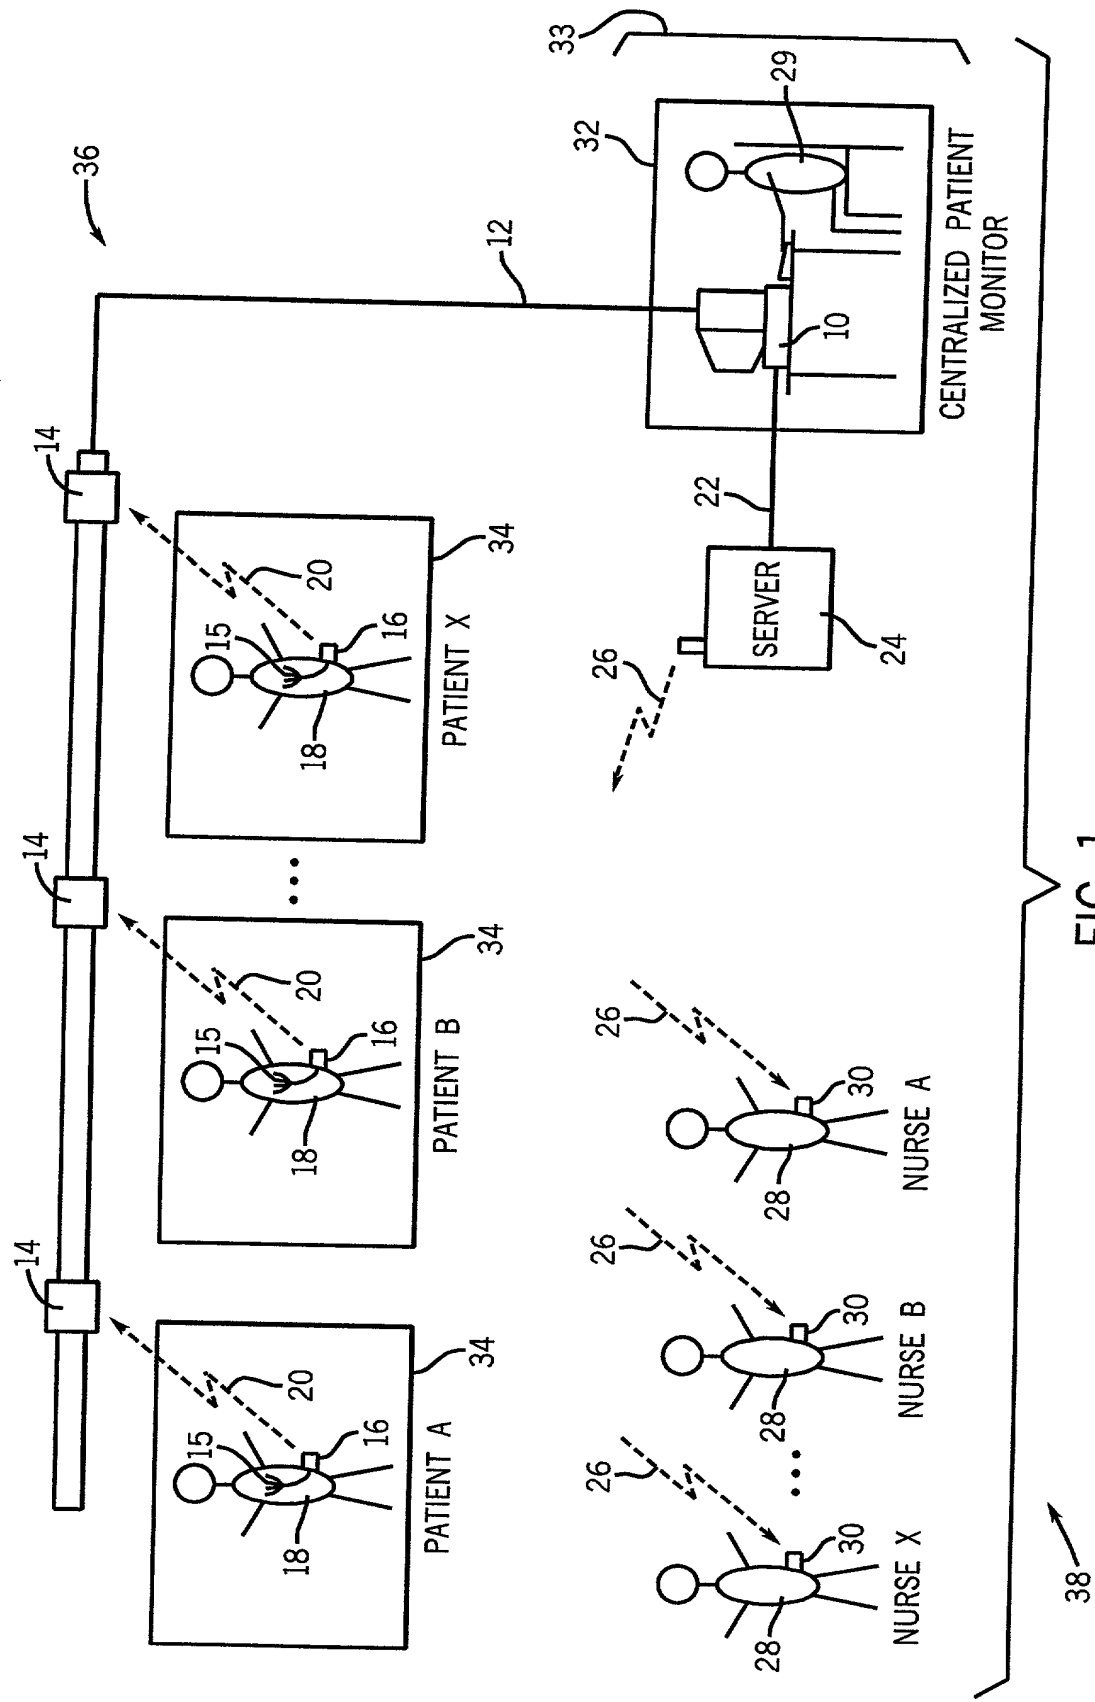


FIG. 1  
PRIOR ART



FIG. 3

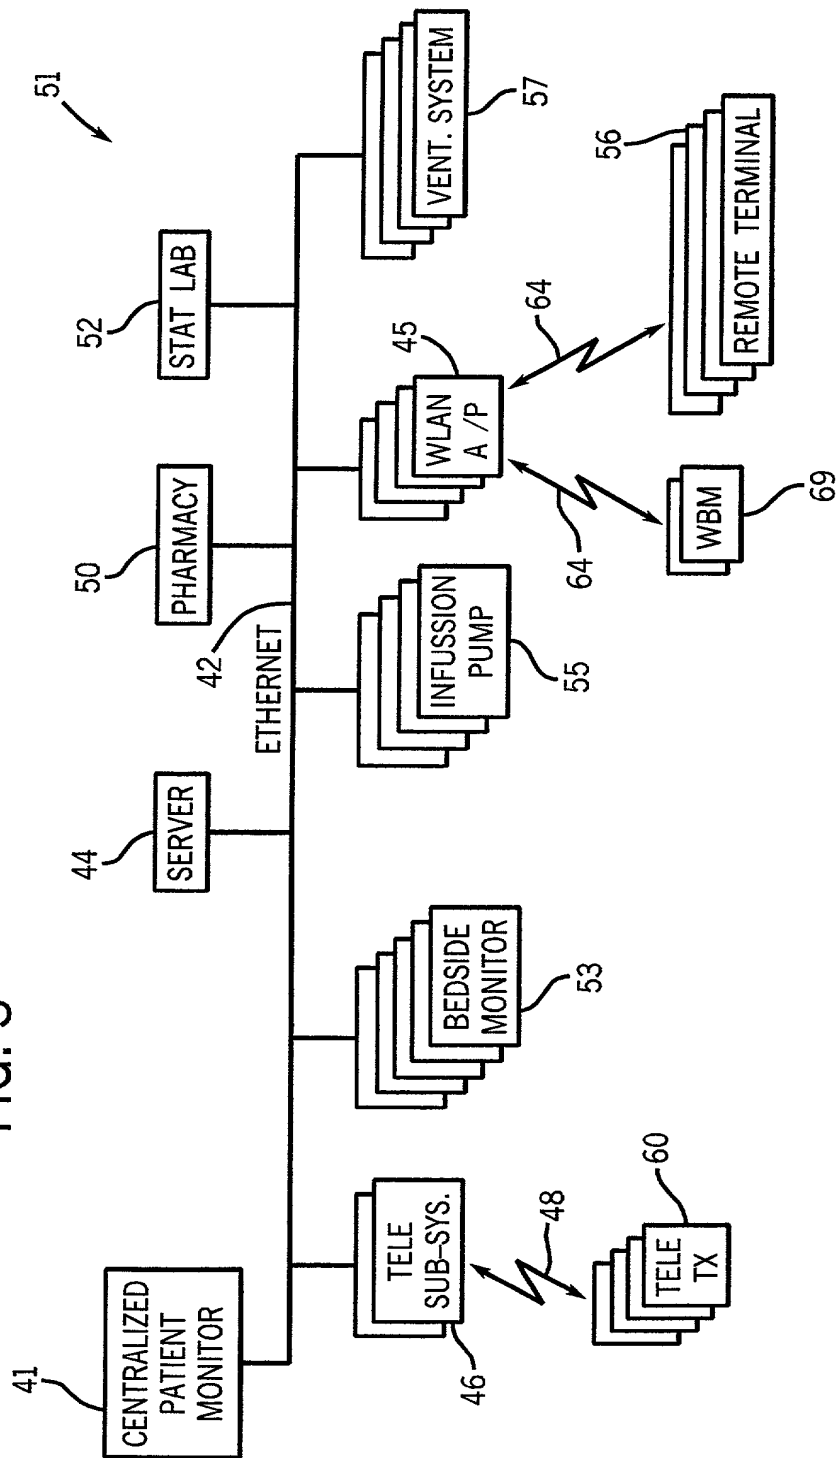
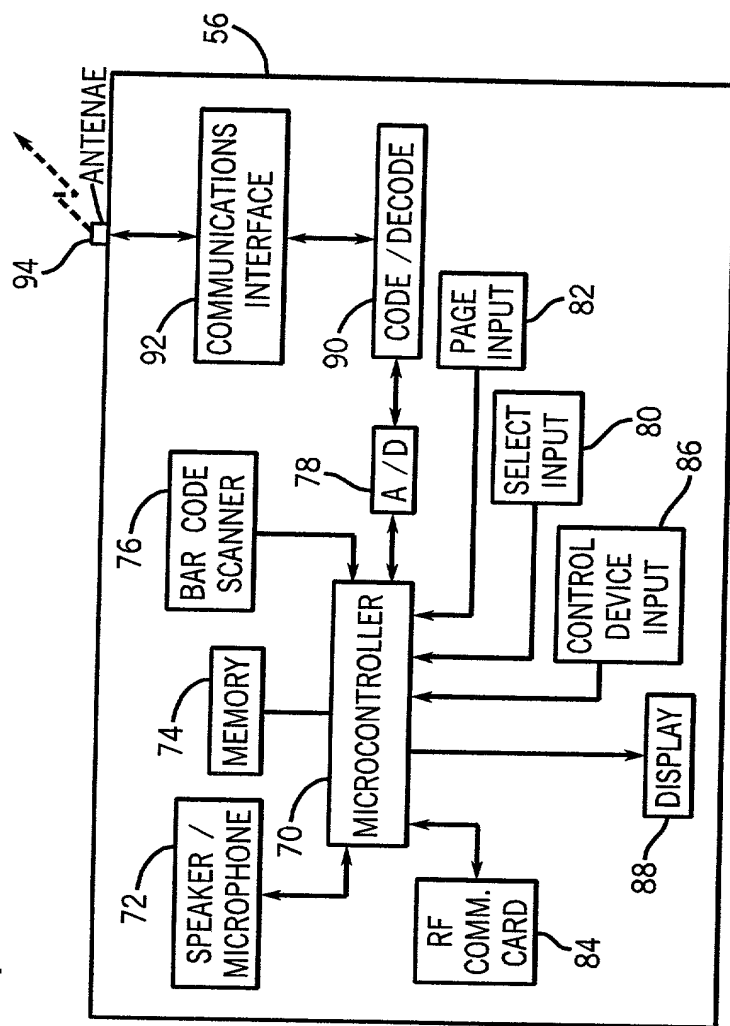


FIG. 4



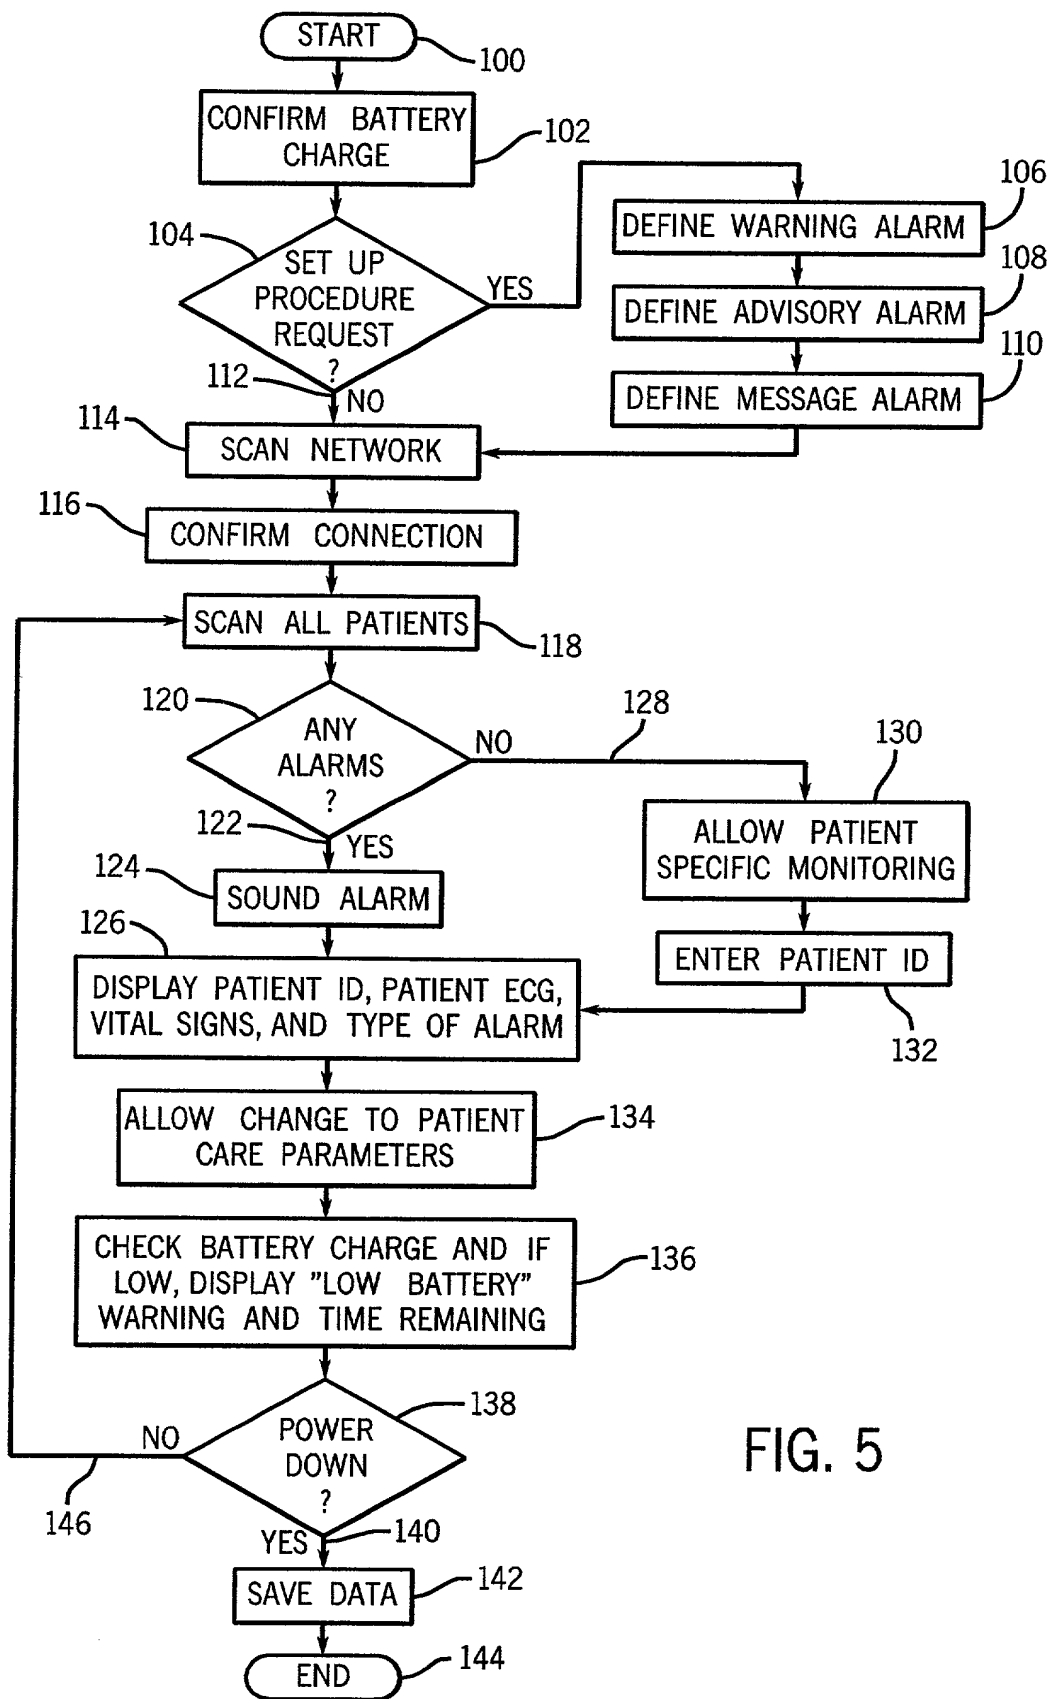


FIG. 5

Patent

Attorney Docket No.GEMS8081.041

---

**COMBINED DECLARATION AND POWER OF ATTORNEY**

---

As a below named inventor, I hereby declare that:

**TYPE OF DECLARATION**

This declaration is of the following type

- ☒ original
- ☐ design
- ☐ supplemental
- ☐ national stage of PCT
- ☐ divisional
- ☐ continuation
- ☐ continuation-in-part (CIP)

**INVENTORSHIP IDENTIFICATION**

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **MOBILE CLINICAL INFORMATION SYSTEM**

**SPECIFICATION IDENTIFICATION**

the specification of which:

- (a) ☒ is attached hereto.
- (b) ☐ was filed on \_\_\_\_\_, 2000 as ☐ Serial No. \_\_\_\_\_  
or ☐ Express Mail No., as Serial No., not yet known, and was amended  
on (if applicable).
- (c) ☐ was described and claimed in PCT International Application No.  
\_\_\_\_\_ and as amended under PCT Article 19 on  
\_\_\_\_\_ (if any).

## ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

**I acknowledge the duty to disclose information**

- which is material to patentability as defined in 37, Code of Federal Regulations, §1.56
- and which is material to the examination of this application namely, information where there is a substantial likelihood that a reasonable examiner would consider it important in deciding whether to allow the application to issue as a patent.
- ☐ In compliance with this duty there is an information disclosure statement in accordance with 37 CFR 1.98 herein attached.

**PRIORITY CLAIM**

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

- ☒ No such applications have been filed.  
☐ Such applications have been filed as follows:

**PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION  
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119**

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO



**CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)**  
**(34 U.S.C. § 119(e))**

I hereby claim the benefit under Title 35, United States Code, § 119(3) of any United States provisional application(s) listed below:

**PROVISIONAL APPLICATION NUMBER**

**FILING DATE**

**CLAIM FOR BENEFIT OF EARLIER US/PCT APPLICATION(S)**  
**UNDER 35 U.S.C. 120**

- ☐ The claim for the benefit of any such applications are set forth in the attached ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR CONTINUATION-IN-PART (C-I-P) APPLICATION.

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS**  
**(6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION**

- ☒ No such applications have been filed.  
☐ Such applications have been filed as follows:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
			<input type="checkbox"/> YES <input type="checkbox"/> NO

**POWER OF ATTORNEY**

I hereby appoint the following attorney(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Timothy J. Ziolkowski      Reg. No. 38,368

along with the following registered attorneys and agents of GE MEDICAL SYSTEMS, 3000 North Grandview Boulevard, W-710, Waukesha, Wisconsin 53188:

Christian G. Cabou      Reg. No. 35,467  
Phyllis Y. Price      Reg. No. 34,234

along with the following registered attorneys and agents of GENERAL ELECTRIC COMPANY, 3135 Easton Turnpike, W3C, Fairfield, Connecticut 06431:

Jay L. Chaskin      Reg. No. 24,030  
Ronald E. Myrick      Reg. No. 26,315  
Henry J. Policinski      Reg. No. 26,621

0000004268960

☐ Attached as part of this declaration and power of attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representative(s).

**SEND CORRESPONDENCE TO**

**DIRECT TELEPHONE CALLS TO:**

**Timothy J. Ziolkowski**  
**Cooke & Franke**  
**660 East Mason Street**  
**Milwaukee, Wisconsin 53202-3877**

**(414) 271-5900**

## DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## SIGNATURES

Full name of first Inventor James W. Brinsfield  
Inventor's signature [Signature]  
Date 10.6.04 Country of Citizenship USA  
Residence Mequon, Wisconsin  
Post Office Address 7909 West Kensington Drive, Mequon, WI 53097

Full name of Second Inventor George M. Hutchinson  
Inventor's signature *George M. Hutchinson*  
Date 09-Oct-2000 Country of Citizenship USA  
Residence Brookfield, Wisconsin  
Post Office Address 18665 San Fernando Drive, Brookfield, WI 53045

► **This declaration ends with this page**